

Clicomatic LP

Model CL 015 / 017


Clicomatic LP

Appreciated lubricator delivered to railways, tramways and subways all over the world.


- Reduce rail wear in curves by as much as 98%
- Reduce wear on wheel flanges by as much as 50 %
- Use a very small amount of grease, only 17 g / 1000 wheels
- No contact between the lubricator and the rail or wheels means no practical wear on the lubricator
- The need for maintenance and service are exceptionally low
- Possibility to use environment-friendly grease such as bio-degradable variants
- Powered by a nitrogen (N2) gas bottle and a 9V battery which gives full flexibility to choose installation site



Inside of cabinet

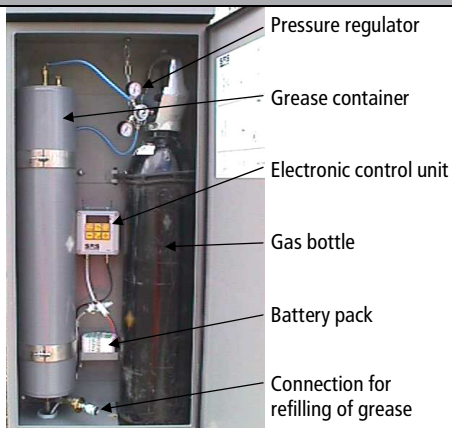

Greasegunhouse

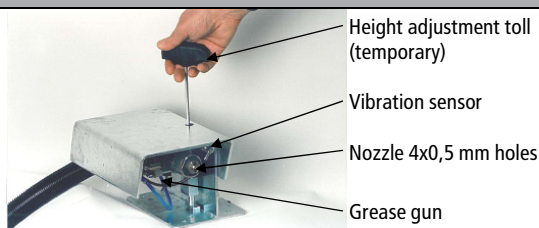

Technical specifications CLICOMATIC LP

Steel cabinet:

HEIGHT	1100 mm
WIDTH	540 mm
DEPTH	285 mm
WEIGHT WITHOUT GREASE	approx 70 kg

Gas bottle (not included):

AGA OTC 20 or similar with correct dimensions and fitting	
TYPE OF GAS	Nitrogen, N2
DIAMETER (MAXIMUM)	204 mm
HEIGHT (MAXIMUM)	1065 * 20 mm
WEIGHT (FULL)	38 kg

Hose length:

STANDARD	4500 mm
DIAMETER	36 mm

Grease cylinder:

MAX VOLUME	approx. 15 kg
------------	---------------

Clicomatic EC

Model CL 020 / 022 (CL024 / 026)


Clicomatic EC

Appreciated lubricator delivered to railways, tramways and subways all over the world.


- Reduce rail wear in curves by as much as 98%
- Reduce wear on wheel flanges by as much as 50 %
- Use a very small amount of grease, only 17 g / 1000 wheels
- No contact between the lubricator and the rail or wheels means no practical wear on the lubricator
- The need for maintenance and service are exceptionally low
- Easy connected to 230V/50Hz (or 115V/60Hz)
- Possibility to use environment-friendly grease such as bio-degradable variants
- The filled grease container weighs only 15 kg



Inside of cabinet

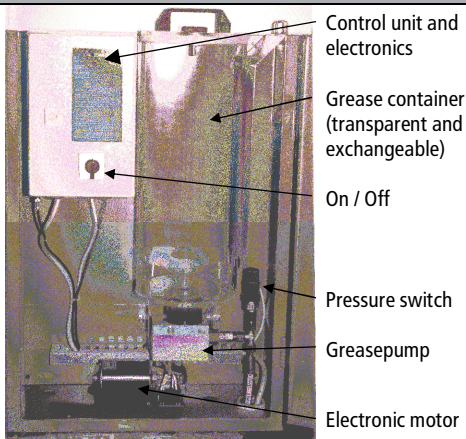

Greasegunhouse

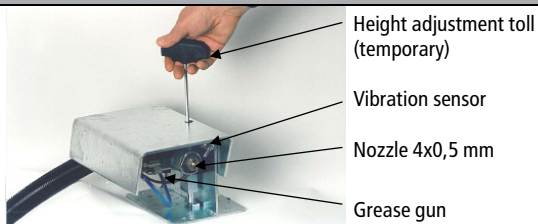

Technical specifications CLICOMATIC EC

Main cabinet dimensions:

HEIGHT	852 mm
WIDTH	530 mm
DEPTH	280 mm
WEIGHT WITHOUT GREASE	approx 30 kg

Grease cartridge:

LENGTH	530 mm
DIAMETER	200 mm
MAX. VOLUME	approx 10 kg
PRESSURE	atmosphere
WEIGHT WITHOUT GREASE	3 kg
WEIGHT WITH GREASE	15 kg

Hose length:

STANDARD	4500 mm
DIAMETER	36 mm

Power:

TYPE 020 / 022	230 V / 50 Hz (115V / 60Hz)
----------------	-------------------------------